

SG-LOK Pipe Fittings




Samwon Green Co., Ltd.
101, Mayu-ro 20beon-gil, Siheung-si, Gyeonggi-do, Republic of Korea
Tel. 031-431-3452 / Fax. 031-431-3460

Thread Information

1. NPT Tapered Pipe Thread

NPT (National Pipe Thread) is based on ANSI B1.20.1.

- Tapered thread ($1^{\circ} 47'$)
- Truncation of roots and crests are flat
- 60° thread angle
- Pitch is measured in threads per inch

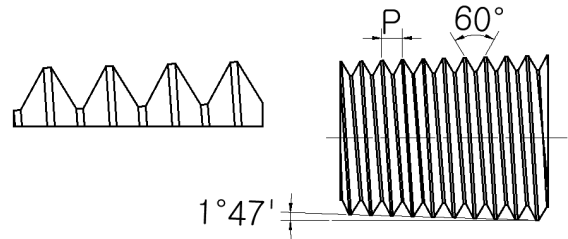


2. ISO 7/1 Tapered Pipe Thread

International Organization for Standard (ISO 7/1) Tapered (PT)

Equivalent to BSPT, DIN 2999, JIS B0203

- Tapered thread ($1^{\circ} 47'$)
- Truncation of roots and crests are rounded
- 55° thread angle
- Pitch is measured in threads per inch

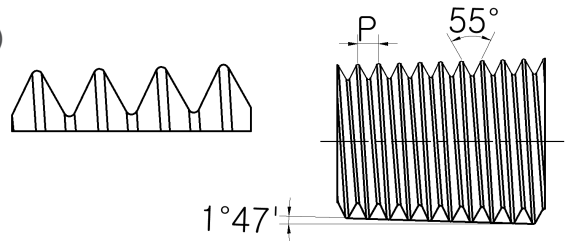


3. ISO 228/1 Parallel Pipe Thread

International Organization for Standard (ISO 228/1) Parallel(PF)

Equivalent to BSPP, DIN ISO228/1, JIS B0202

- Straight thread
- Truncation of roots and crests are rounded
- 55° thread angle
- Pitch is measured in threads per inch

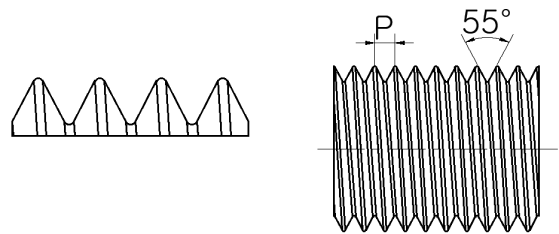

How To order

SG-LOK pipe fittings are ordered by part number as shown below.

Example: The following part number, SHRN-12N-08N-SS is designated for Hex Reducing Nipple with 3/4" Male NPT and 1/2" Male NPT, 316SS.

S	HRN	12	N	08	N	SS
SG-LOK Pipe Fitting	Fitting Type	Pipe Thread Size	Thread Type	Pipe Thread Size	Thread Type	Material

Fitting Type	Refer to the part number in the dimension table.
--------------	--

Pipe Thread Size Designation						
Pipe Size (inch)	1/8	1/4	3/8	1/2	3/4	1
Designator	02	04	06	08	12	16

Thread Type Designation		
Thread Type		Designator
NPT	National Pipe Thread	N
PT	ISO 7/1 Tapered Pipe Thread	R
PF	ISO 228/1 Parallel Pipe Thread	G


Material Designation	
Material	Designator
316SS	SS
Brass	BS
Alloy 400	MO

Ordering Information & Dimension

[Connects Female Pipe to Female Pipe]

SCN


Close Nipple



Part No.	P (NPT)	Dimensions (mm)	
		L	E
SCN-02N	1/8	19.1	4.8
SCN-04N	1/4	28.4	7.0
SCN-06N	3/8	28.4	10.0
SCN-08N	1/2	38.1	12.0
SCN-12N	3/4	38.1	16.0
SCN-16N	1	47.8	22.0

SHN


Hex Nipple



Part No.	P (NPT)	Dimensions (mm)			
		L	E	H	
				inch	mm
SHN-02N	1/8	25	4.8	7/16	11.11
SHN-04N	1/4	35	7.0	9/16	14.28
SHN-06N	3/8	36	10.0	11/16	17.46
SHN-08N	1/2	47	12.0	7/8	22.22
SHN-12N	3/4	47	16.0	1-1/16	26.98
SHN-16N	1	59	22.0	1-3/8	34.92

SHLN

Hex Long Nipple

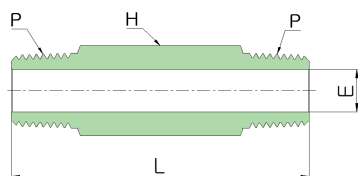


Part No.	P (NPT)	Dimensions (mm)			
		L	E	H	
				inch	mm
SHLN-02N-1.5	1/8	40	4.8	7/16	11.11
SHLN-02N-2.0		50			
SHLN-02N-2.5		65			
SHLN-02N-3.0		75			
SHLN-02N-4.0		100			
SHLN-04N-1.5	1/4	40	7.0	9/16	14.28
SHLN-04N-2.0		50			
SHLN-04N-2.5		65			
SHLN-04N-3.0		75			
SHLN-04N-4.0		100			
SHLN-04N-6.0		150			
SHLN-06N-2.0	3/8	50	10.0	11/16	17.46
SHLN-06N-3.0		75			
SHLN-06N-4.0		100			
SHLN-08N-2.0	1/2	50	12.0	7/8	22.22
SHLN-08N-3.0		75			
SHLN-08N-4.0		100			
SHLN-08N-6.0		150			
SHLN-12N-3.0	3/4	75	16.0	1-1/16	26.98
SHLN-12N-4.0		100			
SHLN-16N-3.0	1	75	22.0	1-3/8	34.92
SHLN-16N-4.0		100			

ISO7/1 Tapered Threads (PT) are available for all fractional sizes of pipe Fitting. Add "R" as a suffix instead of "N".
Dimensions are for reference only and are subject to change without prior notice.

[Connects Female Pipe to Female Pipe]

SHRN


Hex Reducing Nipple



Part No.	P (NPT)	P1 (NPT)	Dimensions (mm)			
			L	E	H	
					inch	mm
SHRN-04N02N	1/4	1/8	31.0	4.8	9/16	14.28
SHRN-06N04N	3/8	1/4	36.0	7.0	11/16	17.46
SHRN-08N04N	1/2	1/4	42.0	7.0	7/8	22.22
SHRN-08N06N	1/2	3/8	42.0	10.0	7/8	22.22
SHRN-12N06N	3/4	3/8	44.0	10.0	1-1/16	26.98
SHRN-12N08N	3/4	1/2	49.0	12.0	1-1/16	26.98
SHRN-16N08N	1	1/2	54.0	12.0	1-3/8	34.92
SHRN-16N12N	1	3/4	54.0	16.0	1-3/8	34.92

SLN


Hex Long Nipple



Part No.	P (NPT)	Dimensions (mm)		
		L	E	D
SLN-02N-1.5	1/8	40	5.7	Φ10.5
SLN-02N-2.0		50		
SLN-02N-2.5		65		
SLN-02N-3.0		75		
SLN-02N-4.0		100		
SLN-04N-1.5	1/4	40	7.8	Φ13.8
SLN-04N-2.0		50		
SLN-04N-2.5		65		
SLN-04N-3.0		75		
SLN-04N-4.0		100		
SLN-04N-6.0		150		
SLN-06N-2.0	3/8	50	10.9	Φ17.3
SLN-06N-3.0		75		
SLN-06N-4.0		100		
SLN-08N-2.0	1/2	50	14.3	Φ21.7
SLN-08N-3.0		75		
SLN-08N-4.0		100		
SLN-08N-6.0		150		
SLN-12N-3.0	3/4	75	19.4	Φ27.2
SLN-12N-4.0		100		
SLN-16N-3.0	1	75	25.0	Φ34.0
SLN-16N-4.0		100		

SME


Male Elbow



Part No.	P (NPT)	Dimensions (mm)			
		L	E	H	
				inch	mm
SME-02N	1/8	19.5	4.8	7/16	11.11
SME-04N	1/4	23.4	7.0	1/2	12.70
SME-06N	3/8	28.0	10.0	11/16	17.46
SME-08N	1/2	36.8	12.0	13/16	20.63

SMT

Male Tee




Part No.	P (NPT)	Dimensions (mm)			
		L	E	H	
				inch	mm
SMT-02N	1/8	19.5	4.8	1/2	12.70
SMT-04N	1/4	23.4	7.0	1/2	12.70
SMT-06N	3/8	28.0	10.0	11/16	17.46
SMT-08N	1/2	36.8	12.0	13/16	20.63

ISO7/1 Tapered Threads (PT) are available for all fractional sizes of pipe Fitting. Add "R" as a suffix instead of "N".
Dimensions are for reference only and are subject to change without prior notice.

[Connects Female Pipe to Male Pipe]

SRB

Reducing Bushing




Part No.	P (male NPT)	P1 (female NPT)	Dimensions (mm)			
			L	E	H	
					inch	mm
SRB-04N-02N	1/4	1/8	22.0	8.0	9/16	14.28
SRB-06N-04N	3/8	1/4	23.0	11.0	11/16	17.46
SRB-08N-04N	1/2	1/4	28.0	11.0	7/8	22.22
SRB-08N-06N	1/2	3/8	28.0	15.0	7/8	22.22
SRB-12N-04N	3/4	1/4	31.0	11.0	1-1/16	26.98
SRB-12N-06N	3/4	3/8	31.0	15.0	1-1/16	26.98
SRB-12N-08N	3/4	1/2	31.0	18.0	1-1/16	26.98
SRB-16N-08N	1	1/2	35.0	18.0	1-3/8	34.92
SRB-16N-12N	1	3/4	35.0	22.0	1-3/8	34.92

[Connects Male Pipe to Female Pipe]

SA


Adapter



Part No.	P (NPT)	Dimensions (mm)			
		L	E	H	
				inch	mm
SA-02N	1/8	28.0	4.8	9/16	14.28
SA-04N	1/4	33.0	7.0	3/4	19.05
SA-06N	3/8	36.0	10.0	7/8	22.22
SA-08N	1/2	45.0	12.0	1-1/16	26.98
SA-12N	3/4	50.0	16.0	1-1/4	31.75
SA-16N	1	58.0	22.0	1-5/8	41.27

SRA


Reducing Adapter



Part No.	P (female NPT)	P1 (male NPT)	Dimensions (mm)			
			L	E	H	
					inch	mm
SRA-04N02N	1/4	1/8	30.0	4.8	3/4	19.05
SRA-06N04N	3/8	1/4	35.0	7.0	7/8	22.22
SRA-08N04N	1/2	1/4	39.0	7.0	1-1/16	26.98
SRA-08N06N	1/2	3/8	41.0	10.0	1-1/16	26.98
SRA-12N06N	3/4	3/8	44.0	10.0	1-1/4	31.75
SRA-12N08N	3/4	1/2	48.0	12.0	1-1/4	31.75
SRA-16N08N	1	1/2	52.0	12.0	1-5/8	41.27
SRA-16N12N	1	3/4	55.0	16.0	1-5/8	41.27

SSE

Street Elbow




Part No.	P (NPT)	Dimensions (mm)				
		L1	L2	E	H	
					inch	mm
SSE-02N	1/8	26.4	22.1	4.8	1/2	12.70
SSE-04N	1/4	29.7	29.7	7.0	11/16	17.46
SSE-06N	3/8	36.1	32.0	10.0	13/16	20.63
SSE-08N	1/2	39.6	39.6	12.0	1	25.40

ISO7/1 Tapered Threads (PT) are available for all fractional sizes of pipe Fitting. Add "R" as a suffix instead of "N".
Dimensions are for reference only and are subject to change without prior notice.

[Connects Male Pipe to Female Pipe]

SST


Street Tee



Part No.	P (NPT)	Dimensions (mm)				
		L1	L2	E	H	
					inch	mm
SST-02N	1/8	26.4	22.1	4.8	1/2	12.70
SST-04N	1/4	29.7	29.7	7.0	11/16	17.46
SST-06N	3/8	36.1	32.0	10.0	13/16	20.63
SST-08N	1/2	39.6	39.6	12.0	1	25.40

SBT

Branch Tee




Part No.	P (NPT)	Dimensions (mm)				
		L1	L2	E	H	
					inch	mm
SBT-02N	1/8	26.4	22.1	4.8	1/2	12.70
SBT-04N	1/4	29.7	29.7	7.0	11/16	17.46
SBT-06N	3/8	36.1	32.0	10.0	13/16	20.63
SBT-08N	1/2	39.6	39.6	12.0	1	25.40

[Connects Male Pipe to Male Pipe]

SC


Coupling



Part No.	P (NPT)	Dimensions (mm)			
		L	E	H	
				inch	mm
SC-02N	1/8	21.0	8.0	9/16	14.28
SC-04N	1/4	30.0	11.0	3/4	19.05
SC-06N	3/8	30.0	15.0	7/8	22.22
SC-08N	1/2	40.0	18.0	1-1/16	26.98
SC-12N	3/4	42.0	22.0	1-1/4	31.75
SC-16N	1	51.0	25.0	1-5/8	41.27

SRC

Reducing Coupling




Part No.	P (NPT)	P1 (NPT)	Dimensions (mm)			
			L	E	H	
					inch	mm
SRC-04N02N	1/4	1/8	30.0	8.0	3/4	19.05
SRC-06N04N	3/8	1/4	30.0	11.0	7/8	22.22
SRC-08N04N	1/2	1/4	40.0	11.0	1-1/16	26.98
SRC-08N06N	1/2	3/8	40.0	15.0	1-1/16	26.98
SRC-12N06N	3/4	3/8	42.0	15.0	1-1/4	31.75
SRC-12N08N	3/4	1/2	42.0	18.0	1-1/4	31.75
SRC-16N08N	1	1/2	51.0	18.0	1-5/8	41.27
SRC-16N12N	1	3/4	51.0	22.0	1-5/8	41.27

ISO7/1 Tapered Threads (PT) are available for all fractional sizes of pipe Fitting. Add "R" as a suffix instead of "N".
Dimensions are for reference only and are subject to change without prior notice.

[Connects Male Pipe to Male Pipe]

SFE


Female Elbow



Part No.	P (NPT)	Dimensions (mm)			
		L	E	H	
				inch	mm
SFE-02N	1/8	26.4	8.6	1/2	12.70
SFE-04N	1/4	29.7	11.4	11/16	17.46
SFE-06N	3/8	36.0	14.9	13/16	20.63
SFE-08N	1/2	39.6	18.5	1	25.40

SFT


Female Tee



Part No.	P (NPT)	Dimensions (mm)			
		L	E	H	
				inch	mm
SFT-02N	1/8	26.4	8.6	1/2	12.70
SFT-04N	1/4	29.7	11.4	11/16	17.46
SFT-06N	3/8	36.1	14.9	13/16	20.63
SFT-08N	1/2	39.6	18.5	1	25.40

SUBJ

Union Ball Joints




Part No.	P (NPT)	Dimensions (mm)					
		L	E	H		H1	
				inch	mm	inch	mm
SUBJ-04N	1/4	59.4	9.1	1-3/8	34.92	1-3/16	30.16
SUBJ-06N	3/8	63.5	13.2	1-1/2	38.10	1-1/4	31.75
SUBJ-08N	1/2	68.3	15.7	1-3/4	44.45	1-5/8	41.27
SUBJ-12N	3/4	79.2	22.4	2-1/8	53.97	1-7/8	47.62
SUBJ-16N	1	90.4	26.2	2-1/2	63.50	2-3/8	60.32

[Connects Male Pipe]

SPC

Pipe Cap




Part No.	P (NPT)	Dimensions (mm)		
		L	H	
			inch	mm
SPC-02N	1/8	19.0	9/16	14.28
SPC-04N	1/4	23.0	3/4	19.05
SPC-06N	3/8	23.0	7/8	22.22
SPC-08N	1/2	34.0	1-1/16	26.98
SPC-12N	3/4	34.0	1-1/4	31.75
SPC-16N	1	41.0	1-5/8	41.27

[Connects Female Pipe]

SPP

Pipe Plug



Part No.	P (NPT)	Dimensions (mm)		
		L	H	
			inch	mm
SPP-02N	1/8	19.0	7/16	11.11
SPP-04N	1/4	24.0	9/16	14.28
SPP-06N	3/8	25.0	11/16	17.46
SPP-08N	1/2	31.0	7/8	22.22
SPP-12N	3/4	31.0	1-1/16	26.98
SPP-16N	1	38.0	1-3/8	34.92

ISO7/1 Tapered Threads (PT) are available for all fractional sizes of pipe Fitting. Add "R" as a suffix instead of "N".
Dimensions are for reference only and are subject to change without prior notice.